



DEPARTMENT OF ENVIRONMENTAL CONSERVATION

FLOOD HAZARD AREA AND RIVER CORRIDOR

PROTECTION PROCEDURE

OCTOBER 6, 2014



**DEC Flood Hazard Area and River Corridor Protection Procedure
October 6, 2014**

Table of Contents

1.0 PURPOSE.....3

2.0 STATUTORY AUTHORITY.....3

3.0 INTRODUCTION.....5

4.0 DEFINING AND MAPPING FLOOD HAZARD AREAS AND RIVER CORRIDORS.....6

5.0 ADOPTION, AMENDMENT, AND REVISION OF MAPS.....13

6.0 ACT 250/SECTION 248 FLOODWAY DETERMINATIONS.....18

7.0 DEC REGULATORY RECOMMENDATIONS.....19

8.0 BEST MANAGEMENT PRACTICES.....23

9.0 DEFINITIONS.....28

10.0 REFERENCES.....32

**Appendix A: Exception to the River Corridor No Adverse Impact Standard for
Improvements Between Existing Improvements.....35**

**Appendix B: Exception to the River Corridor No Adverse Impact Standard for
Improvements in the Down-River Shadow of an Existing Improvement.....36**

1.0 PURPOSE

- (a) The purpose of this Procedure is to provide how the Department of Environmental Conservation (DEC or Department):
- (1) defines and maps flood hazard areas and river corridors for the purposes of Act 250 (10 V.S.A. § 6001 *et seq.*), Section 248 (30 V.S.A. §§ 248 and 248a), municipal zoning bylaw and development reviews (24 V.S.A. § 4424), administering the state Flood Hazard Area and River Corridor Rule, and the regulation of berming (10 V.S.A. § 1021);
 - (2) shall involve municipalities, the Regional Planning Commissions, Act 250 District Commissions, affected parties, and the general public in the adoption, amendment, and revision of flood hazard area maps under the National Flood Insurance Program (NFIP) and river corridor maps through the DEC River Corridor Mapping Program.
 - (3) determines what constitutes a “floodway” as applied in the review of Act 250 and Section 248 applications under Criterion 1(D);
 - (4) makes recommendations to Act 250 District Commissions, the Natural Resources Board, the Public Service Board, municipalities, and other jurisdictions on the regulatory measures necessary to avoid the endangerment of the health, safety, and welfare of the public and of riparian owners during flooding¹;
 - (5) makes recommendations to other programs, departments, and agencies of state government regarding activities proposed in flood hazard areas and river corridors; and
 - (6) has established floodplain and river corridor best management practices, including the provision of model flood hazard area and river corridor protection bylaws and ordinances for adoption by municipalities and regional planning commissions.
- (b) This Procedure may be amended by the Agency of Natural Resources (ANR or Agency) on its own motion or based upon input received from members of the public, municipalities and other governmental entities, and other affected persons.

2.0 STATUTORY AUTHORITY

Between 2010 and 2014, the Vermont General Assembly passed four separate Acts (110 (2010), 138 (2012), 16 (2013), and 107 (2014)) containing various sections directing the Agency to establish a *River Corridor and Floodplain Management Program* and to promote and encourage the identification and protection of flood hazard areas and river corridors to reduce flood and fluvial erosion hazards.

ANR has charged DEC with the responsibility to carry out this Procedure. DEC will work in cooperation with municipalities, the Regional Planning Commissions, and other state agencies to map flood hazard areas and river corridors to ensure compliance with NFIP and state law, and to meet the policy objectives of protecting the health, safety, and welfare of the general public from flood and fluvial erosion hazards (10 V.S.A. §§ 753, 1023, 1427, and 1428).

¹ Regulatory recommendations made according to this Procedure shall be consistent with the state Flood Hazard Area & River Corridor Rule adopted by the Agency of Natural Resources (ANR or Agency) to regulate activities exempt from municipal regulation.

Specifically, the Procedure shall be applied to the following areas of Department authority:

(1) **Stream Alteration Rule, and Flood Hazard Area & River Corridor Rule.** The State must regulate the construction of berms in flood hazard areas and river corridors (10 V.S.A. § 1021(a)). Additionally, the State must regulate “activities exempt from municipal regulation” located within flood hazard areas or river corridors (10 V.S.A. § 754). To aid in meeting these statutory requirements, this Procedure defines the mapping methods used by the Federal Emergency Management Agency (FEMA) and DEC to delineate flood hazard areas and river corridors. The Procedure also details the process used to publically notice, amend, and revise such maps as required by 10 V.S.A. §§ 1422, 1427, and 1428.

(2) **Act 250 Land Use and Section 248 Facilities.** Criterion 1(D) of Act 250 provides that:

A permit will be granted whenever it is demonstrated by the applicant that, in addition to all other applicable criteria: (i) the development or subdivision of lands within a floodway will not restrict or divert the flow of flood waters, and endanger the health, safety and welfare of the public or of riparian owners during flooding; and (ii) the development or subdivision of lands within a floodway fringe will not significantly increase the peak discharge of the river or stream within or downstream from the area of development and endanger the health, safety, or welfare of the public or riparian owners during flooding. 10 V.S.A. § 6086(a)(1)(D).

Act 250 authorizes the Secretary of the Agency of Natural Resources² to make case-by-case determinations on what constitutes the floodway and floodway fringe (10 V.S.A. § 6001(6) and (7)). The Vermont Supreme Court affirmed the Secretary’s authority to make floodway and floodway fringe determinations, without adopting an administrative rule, based on the plain language of the statute, which authorizes the Secretary to make such determinations (In re Woodford Packers, Inc., 2003 VT 60, ¶ 12-13, 175 Vt. 579, 830 A.2d 100).

Section 248 requires the Public Service Board to give “due consideration” to Criterion 1(D) of Act 250 (30 V.S.A. §§ 248(b)(5) and 248a(c)(1)).

This Procedure shall be used by DEC to make Act 250 floodway determinations and to make recommendations to the Natural Resources Board and Public Service Board concerning restrictions necessary to avoid the endangerment of the health, safety, and welfare of the public and riparian owners during flooding.

(3) **Municipal Land Use Regulation.** The municipal and regional planning and development statutes mandate that if a municipality has adopted flood or other hazard area bylaws, no permit for new construction or substantial improvement shall be granted for work in a flood or other hazard area until the application is submitted to the Agency of Natural Resources or its designee.³ 24 V.S.A. § 4424(a)(2)(D). This Procedure shall be used by DEC to confirm the delineation of flood hazard areas and river corridors protected in municipal bylaws, make recommendations to ensure development complies with the local bylaws, and promote the protection of floodplains and river corridors (24 V.S.A. § 4424(a)(2)(D); 10 V.S.A §§ 751 and 1421).

² The Secretary has delegated this authority to the Commissioner of the Department of Environmental Conservation.

³ The Agency has 30 days following notification to provide technical comments on a proposed permit for new construction or substantial improvement in a flood hazard area.

- (4) **Additional Authorities for the Procedure.** The Secretary shall develop and adopt best management practices for the management of river corridors, floodplains, and buffers (10 V.S.A. § 1427). The Secretary must assist regional planning (24 V.S.A. § 4348a(a)(11)) and municipal planning (24 V.S.A. § 4382(a)(12)) with the development of flood resiliency plans. The Secretary must also create and make available to municipalities model flood hazard and river corridor protection area bylaws and ordinances for potential adoption by municipalities pursuant to 10 V.S.A. §§ 755, 1427, and 1428, 24 V.S.A. chapter 117, and 24 V.S.A. § 2291. This Procedure references model bylaw and ordinance provisions that exceed the minimum requirements for compliance with the NFIP to further minimize the risk of harm to life, property, and infrastructure from flooding as required by 10 V.S.A. §§ 755 and 1428.

3.0 INTRODUCTION

The Vermont State Hazard Mitigation Plan (2013) identifies flooding as the most common natural hazard event in Vermont and the damages from flooding are due to inundation and fluvial erosion. Flooding, exacerbated by debris and ice jams, historic channelization practice, or the plugging and failure of stream crossings such as culverts, can threaten public safety, tax emergency services, cause widespread damage and property loss, bring about socio-economic disruption, and result in significant recovery costs for property owners, municipalities, the State, and the federal government. Nationally, flooding accounts for more losses in lives and damages to property and crops than any other natural disaster.⁴

Floodplain and river corridor science and hazard mitigation policy have evolved at a fast pace, and therefore a set of terms are defined in Section 9.0 of this Procedure.

Inundation, or overbank flooding, occurs when a stream channel or waterbody receives a significant amount of rain or snow melt from its watershed, or when the stream channel is blocked by a debris or ice jam. The excess water spills out onto or inundates the floodplain. Fluvial (river-related) erosion occurs when stream power, due to the increased velocities and height of floodwaters, act on the bed and banks of a stream channel. The magnitude or rate of fluvial erosion is highly variable, ranging from a gradual and continual process to an episodic or catastrophic event.

This Procedure establishes how DEC will make determinations that consider both inundation and fluvial erosion hazards in state and local regulatory processes for the protection of the health, safety, and welfare of the public. This Procedure is sufficiently detailed and includes references to technical documents throughout so that project designers may conduct inundation and erosion hazard analyses and factor floodway and river corridor determinations into project planning, proposals, and design. Reference is made throughout to “DEC technical guidance,” which includes documents available on the Watershed Management Division web pages⁵ that have been produced to further detail the map production process used to implement this Procedure and the state Flood Hazard Area & River Corridor Rule governing development exempt from municipal regulation.

DEC reviews the NFIP maps in the evaluation of proposed projects for inundation-related hazards. DEC’s evaluation of erosion hazards relies on the DEC river corridor maps based on fluvial geomorphic (or physical) assessment protocols, which are contained within the Phase I-III *Vermont Stream Geomorphic Assessment (SGA) Handbooks* (Handbooks, VT DEC, 2009). The *Handbooks* and an introduction to the assessment program are available from the DEC Watershed Management Division.⁶

⁴ <http://vem.vermont.gov/sites/vem/files/HazMit%20Plan%202013.pdf>

⁵ <http://www.watershedmanagement.vt.gov/rivers.htm>

⁶ Contact ANR at 802-828-1535 or visit http://www.watershedmanagement.vt.gov/rivers/htm/rv_geoassess.htm

While NFIP and state maps are largely technical in nature, being based on hydraulic, hydrologic, and fluvial geomorphic processes, there is and must be recognition that these physical processes engender change. Therefore, a map amendment and revision section of the Procedure describes how new data and emerging information may be used to refine or modify maps as site specific information becomes available. The Procedure also offers specific opportunities to participate in the Agency's flood hazard area and river corridor mapping with technical studies, design work, and municipal planning to achieve conformance with the standards or to modify the original flood hazard area and river corridor maps.

Finally, this Procedure describes opportunities to incorporate NFIP and DEC hazard area mapping and regulatory policy in local flood hazard bylaws and ordinances. Pursuant to 24 V.S.A. § 4382(a)(12), communities with town plans must incorporate local flood resiliency elements into their town plans. This Procedure helps to promote local flood resilience planning by providing consistent best management practices and land use regulations across jurisdictions consistent with state and municipal hazard mitigation goals.

4.0 DEFINING AND MAPPING FLOOD HAZARD AREAS AND RIVER CORRIDORS

- (a) **Background.** Flood hazard areas and river corridors are defined and mapped to serve the vital function of dissipating hydraulic energy and providing storage or attenuation of water, sediment, and debris during flooding (consistent with the National Flood Insurance Act of 1968⁷). Incremental land use changes adjacent to stream channels can result in unintended deleterious consequences such as increases in the magnitude and volume of the effective discharge and channelization practices that heighten channel instability (Ward, 2002).

- (1) **Flood Hazard Areas.** Flood hazard areas are those areas of the floodplain that may be inundated by a range of flood frequencies up to and including the one percent annual chance flood (i.e. base flood). Flood hazard areas as referred to in this Procedure are shown on the most current, FEMA-published Flood Insurance Rate Maps (FIRM) on which the NFIP is based.

FEMA has published extensive information regarding the mapping of flood hazard areas. The FEMA Map Service Center⁸ is the primary online repository of flood hazard area data and provides educational information and technical assistance.

Flood insurance studies and flood hazard area maps are on file in the municipal offices of communities participating in the NFIP. In addition, DEC maintains digital copies of the maps and studies and publishes the maps on the ANR Natural Resources Atlas (for those areas where FEMA has produced digital flood hazard area map layers).

Flood insurance study technical information detailing the engineering, scientific, and mapping specifications is available online on FEMA's webpage entitled *Guidelines and Standards for Flood Risk Analysis and Mapping*.⁹

- (2) **River Corridors.** River corridors encompass an area around the present channel where fluvial erosion, channel evolution and down-valley meander migration are most likely to occur. River corridor widths are calculated to represent the narrowest band of valley bottom and ri-

⁷ 42 U.S.C. § 4001 *et seq.*

⁸ FEMA Map Service Center: <https://msc.fema.gov/>, 877-336-2627

⁹ <http://www.fema.gov/guidelines-and-standards-flood-risk-analysis-and-mapping>

riparian land necessary to accommodate the least erosive channel and floodplain geometry (i.e. equilibrium conditions) that would be created and maintained naturally within a given valley setting.

Concerns about channel stability and erosion hazards require a geomorphic (or physical) evaluation to characterize a stream's type, size, existing condition, and sensitivity to erosion hazards. A geomorphic evaluation recognizes the dynamic nature of streams. Streams are constantly adjusting their form and configuration due to the influence of and variation in geology, climate, drainage area; the direction and gradient of flow in relation to a given valley slope; turbulence associated with curved flow; roughness of the bed and banks; erosion, transport, and deposition of sediment; the influx of debris; and the degree of floodplain access (Leopold, 1994, Thorne et al., 1997).

A river is considered stable, or in a state of "dynamic equilibrium," if it can adjust its channel geometry (width, depth, and slope) to efficiently discharge, transport, and store water, sediment, and debris without significant aggradation or degradation of its bed (Leopold, 1994, Rosgen, 1996). A river requires a sufficient corridor to accommodate equilibrium conditions and the channel adjustments that occur when channel geometry is changing vertically and laterally to achieve equilibrium (Brierley and Fryirs, 2005). Failure to provide a sufficient corridor will constrain the river from achieving the equilibrium condition. Thus, managing a river corridor to accommodate equilibrium and associated channel adjustment processes will serve to reduce damages to existing structures and property, avoid new damages, protect public safety, achieve the general health of the river system, and avoid the high cost to install and maintain channelization practices (Piegay, 2005). Precluding the use of channelization practices, in turn, will avoid the unintended consequences of transferring bank erosion and other damaging effects from concentrated flow and vertical channel adjustments to other locations along the river (Brookes, 1988; Huggett, 2003; Brierley and Fryirs, 2005).

Minimizing vertical channel instability is particularly crucial to maintaining or restoring equilibrium stream conditions and minimizing erosion during floods. Vertical channel instability may be initiated by an increase in scour of the stream bed and banks and subsequent sediment transport due to: (A) increasing runoff volume; (B) confining and/or shortening the stream channel thereby increasing its slope; or (C) restricting stream access to the floodplain. Therefore, this Procedure seeks to provide an adequate floodplain area to accommodate channel adjustment processes necessary to achieve and maintain vertical stability in the longitudinal profile over time. The meander belt represents, on average, the minimum amount of floodplain necessary to accomplish vertical stability (Ward et al., 2002, Ward, 2007). The river corridor includes space for both the meander belt and a riparian buffer.

Many miles of Vermont streams have undergone detailed, field-based study through completed SGA. Based on an analysis of this data, the Agency has divided the vast network of Vermont's perennial rivers and streams¹⁰ into those streams which warrant geomorphic-based river corridor delineations, and those streams which, because of their low sensitivity, small watershed size, steeper valley slope, and/or valley confinement, may attain their least erosive form within an area delineated as a simple setback from the top of each streambank.

¹⁰ Based on the Vermont Hydrography Dataset (1:5000).

(3) **Meander Belt Component of the River Corridor.**

The rationale for defining and managing river corridors is the strong association between stable, sustainable fluvial processes and minimal conflicts with human investments with an unconstrained river corridor which provides a meander belt width dimension (Thorne et al., 1997, Thorne, 1998). For streams in unconfined alluvial valley settings, the average meander belt width is approximately six channel widths wide (Williams, 1986; Vermont SGA data¹¹). The meander belt extends laterally across the river valley from outside meander bend to outside meander bend, thereby encompassing the natural plan form variability of the stream channel (Figure 1), which maintains the equilibrium slope and minimizes vertical channel instability over time along the extent of the stream reach (Riley, 1998). Ideally, the belt width can be achieved by three channel widths either side of a meander centerline.

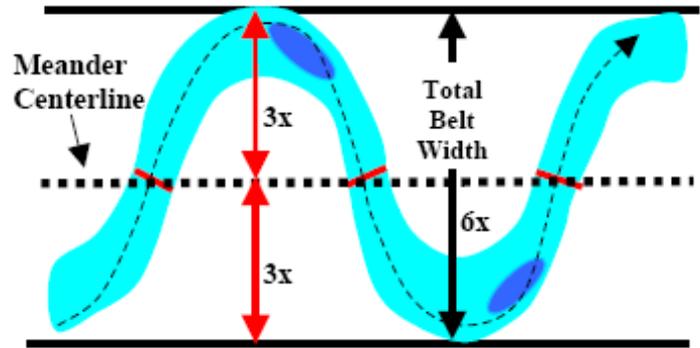


Figure 1. Depiction of Meander Centerline and Belt Width

The meander centerline consists of a line drawn connecting the cross-over points between the meander bendways, or in a straight channel, points along the center of the channel spaced every seven to ten channel widths. Where feasible, the channel width used in calculating the meander belt width should be that associated with equilibrium conditions (i.e., the **reference channel**) for the reach in question. The reference channel condition, however, may differ from the **existing channel** condition.¹² If a significant departure from equilibrium is known or is indeterminate, the reference channel width, as calculated using the Vermont Hydraulic Geometry Curves¹³, is used. Otherwise, DEC uses the existing channel width. Channel width is equal to the bankfull width as referred to in the *Phase I-III Vermont Stream Geomorphic Assessment Handbooks*.

Valley topography or other constraints may prohibit channel plan form adjustment, such that the full six channel widths can only be achieved by providing more width on one side of the stream than the other.¹⁴ Also, note that many of Vermont's streams have been straightened, channelized, or have become incised (deepened), losing access to their historic floodplains. The lateral extent of present-day meanders in this case may be narrower than they would be under equilibrium conditions. These streams are undergoing channel evolution or the processes of erosion and deposition to adjust and re-establish a stable channel slope.¹⁵ Any river corridor which considers erosion hazards should accommodate both existing meanders and the meander belt width associated with equilibrium in order to support these fluvial processes (Ward, 2007).

¹¹ See Vermont data in the *DEC technical guidance*.

¹² Refer to the Stream Geomorphic Assessment, *Program Introduction*, pg. 7 for a more detailed discussion of reference and existing stream types; see footnote 5 above for a link to the ANR website.

¹³ Hydraulic Geometry Curves available at:

http://www.watershedmanagement.vt.gov/rivers/htm/rv_geoassess.htm.

¹⁴ For more discussion of the delineation of the meander centerline and the belt width, refer to Appendix E of the *Phase I-III Vermont Stream Geomorphic Assessment Handbooks* and other *DEC technical guidance*.

¹⁵ Refer to the State Rivers Program's website to examine fluvial geomorphic data stored on the Data Management System or via Map Viewer: <http://www.watershedmanagement.vt.gov/rivers.htm>

- (4) **Riparian Buffer Component of the River Corridor.** River corridors are defined and mapped with a 50 foot buffer on either side of the meander belt to allow space for the establishment and maintenance of an undisturbed vegetated buffer when the equilibrium slope and planform are achieved. The Vermont General Assembly specifically called for the inclusion of buffers within the river corridor (10 V.S.A. § 1422(12)). Vegetated buffers are a least cost, self-maintaining practice to provide stream bank resistance against erosion and moderate lateral channel migration. Providing space for these functions is consistent with the goal of achieving and maintaining least-erosive, equilibrium conditions, thereby minimizing the risk of harm to life, property, and infrastructure from flooding.
- (b) **Procedure for Delineating the Meander Belt and Buffer Components of the River Corridor.** The following steps describe how the meander belt width and other valley characteristics shall be used to ascertain the meander belt and buffer components of a river corridor. Variables include: the inherent stability of the stream channel; its sensitivity to erosion hazards; the presence of natural or significant human-created confining features; the evidence or likelihood of valley side slope failure; and the presence of hydrologically-connected features within the river valley.
- (1) **Streams with a Drainage of Less than or Equal to Two Square Miles.** On the base layer of the Statewide River Corridor Map, small streams shall be assigned a simple setback of at least 50 feet on either side of the stream, measured perpendicular from the top of each streambank. A corridor may be delimited for a small stream during a map revision process, if field data verifies a moderate to high sensitivity;
- (2) **Very Low and Low Sensitivity Streams.** The meander belt width shall be equal to the existing channel width, if the stream is a bedrock or boulder substrate reference stream type (very low to low sensitivity). For mapping purposes, the meander belt shall be delimited at the top of the stream bank of the existing channel or a minimum of a half channel width on either side of the meander centerline, whichever provides the greater lateral extension on either side of the meander belt;
- (3) **Moderately Sensitive Streams (with a drainage greater than 2 square miles).** The meander belt width shall be equal to a minimum of four channel widths, if the stream (i.e., at the reach scale) is a steep to moderate gradient (greater than 2 percent gradient) reference stream type, and the existing stream type does not represent a stream type departure. The meander belt is delineated with a minimum of two channel widths on either side of the meander centerline; or,
- (4) **Highly and Extremely Sensitive Streams (with a drainage greater than 2 square miles).** The meander belt width shall be equal to a minimum of six channel widths, if the stream is a gentle gradient or braided reference stream type or if the stream is in a moderate gradient valley setting, but the existing stream type represents a stream type departure.¹⁶ For stream types that are in either very low gradient settings or very high deposition areas, the meander belt width multiplier may be increased up to eight times the channel width. The meander belt is delineated with a minimum of three to four channel widths on either side of the meander centerline. Within zones of extremely high and active deposition, the river corridor shall be

¹⁶ A stream type departure may be represented by a shift of stream type or a **major** vertical stream adjustment (degradation and/or aggradation); see Steps 2.14 (pp. 34-37) in the *Stream Geomorphic Assessment Handbooks*, Phase 2: http://watershedmanagement.vt.gov/rivers/docs/assessmenthandbooks/rv_weblinkpgphase2.pdf

delineated to include all recent channels and the entire zone of active depositional process;
and,

- (5) **Natural or Human-Imposed Confining Features.** If the meander belt delineation extends beyond the toe of the valley wall, the full meander belt shall be laterally extended on the opposite side, to provide a total belt width as described in Sections 4(b)(2)-(4) above, measured from the toe of the valley wall (Figure 3). This extension may, in some cases, be limited by the valley wall on the opposite side of the stream as well; in which case the meander belt width may be less than the multiple of channel widths prescribed above.

If the initial meander belt delineation extends beyond an engineered levee, railroad, or federal aid highway¹⁷ (with or without an embankment), the full river corridor shall be measured from the toe of that feature and extend laterally on the opposite side. Note, maintaining structural alignments may require reestablishing channel dimensions in those locations. In such cases, the stream will be limited from establishing an equilibrium plan form on lands beyond such infrastructure. Recognizing these built constraints previously established and broadly accepted by society may require an appropriate sizing and lateral shift of the river corridor to allow for the stream adjustment processes and to optimize attainment of equilibrium conditions within the stream reach. Adjustment of the river corridor for road infrastructure does not imply that adjacent road infrastructure is safe from erosion hazards; rather, infrastructure abutting river corridor boundaries may be especially vulnerable to such hazards;

The Secretary may designate a “modified stream” where existing developments have modified the channel, valley, and/or floodplain and effectively constrained stream adjustments that would establish a more natural equilibrium condition. To make such a designation the Secretary shall determine that the river segment or reach has become vertically stable (i.e., the stream bed is not actively aggrading or degrading) and shall alter the meander belt delineation according to the existing, modified sensitivity.

- (6) **Streams Subject to Bank or Slope Failure.** Erosion hazards outside the meander belt may also exist. If field evidence indicates bank erosion and/or large, mass wasting failures along the valley wall exist or would exist concurrent with the edge of the calculated meander belt, an additional setback to the top of the immediately adjacent erodible side-slope¹⁸ (that has a toe that is less than one channel width from the top of the stream bank as depicted in Figure 3) or slope stability allowance, as determined by a geo-technical analysis, may be added to the meander belt to accommodate stable bank slopes (see River Corridor Map Amendment described in Section 5(c)(4)(D)(iv) below);
- (7) **Natural or Manmade Depressions Adjacent to Streams.** If field evidence indicates hydrologically-connected features such as natural or human-created depressions, and old channels adjacent to the stream, the meander belt may extend laterally to encompass those features in recognition of their potential to be captured by the river or contribute to a channel avulsion (relocation) during a flood;

¹⁷ Federal aid highways are a subset of the Vermont roads for which the Vermont Agency of Transportation uses federal aid and include any roads with a functional class designation of 1, 2, 4, 6, 7, 11, 12, 14, 16, or 17.

¹⁸ In this context, an adjacent side slope is a non-bedrock terrace or hillside slope, as described in the ANR Phase 2 Stream Geomorphic Assessment Protocols (Step 1.4).

- (8) **The Riparian Buffer.** All river corridors, except small streams with a drainage of less than or equal to two square miles, shall include a 50 foot buffer as an extension on either side of the meander belt. For small streams, the 50 foot setback from each bank described in Section 4(b)(1) above is to serve both meander and riparian buffer functions. The buffer components may extend past the mapped line of a naturally confining feature (e.g., the toe of the natural valley wall), but shall not go beyond the boundary of an engineered levee, railroad, or federal aid highway (see Figure 2).

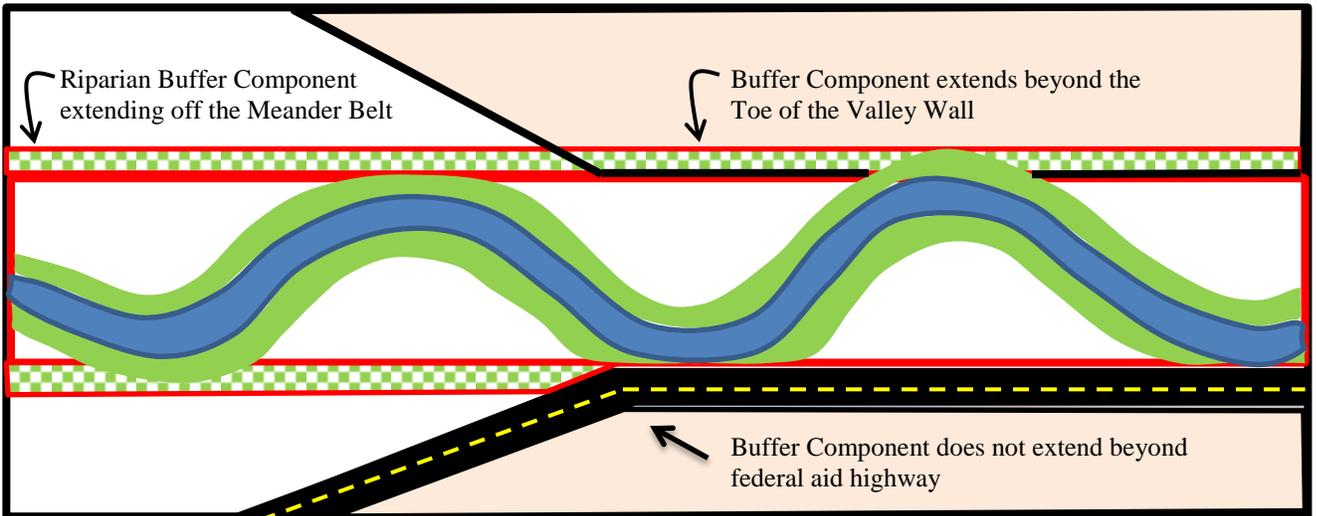


Figure 2. Showing the (green cross-hatched) riparian buffer component of the river corridor, as an extension off the meander belt, to accommodate the actual buffers (green bands) when the stream meanders are at their equilibrium amplitude. Buffer components are drawn beyond natural confining features such as the valley wall but not beyond engineered levees, railroads, or federal aid highways.

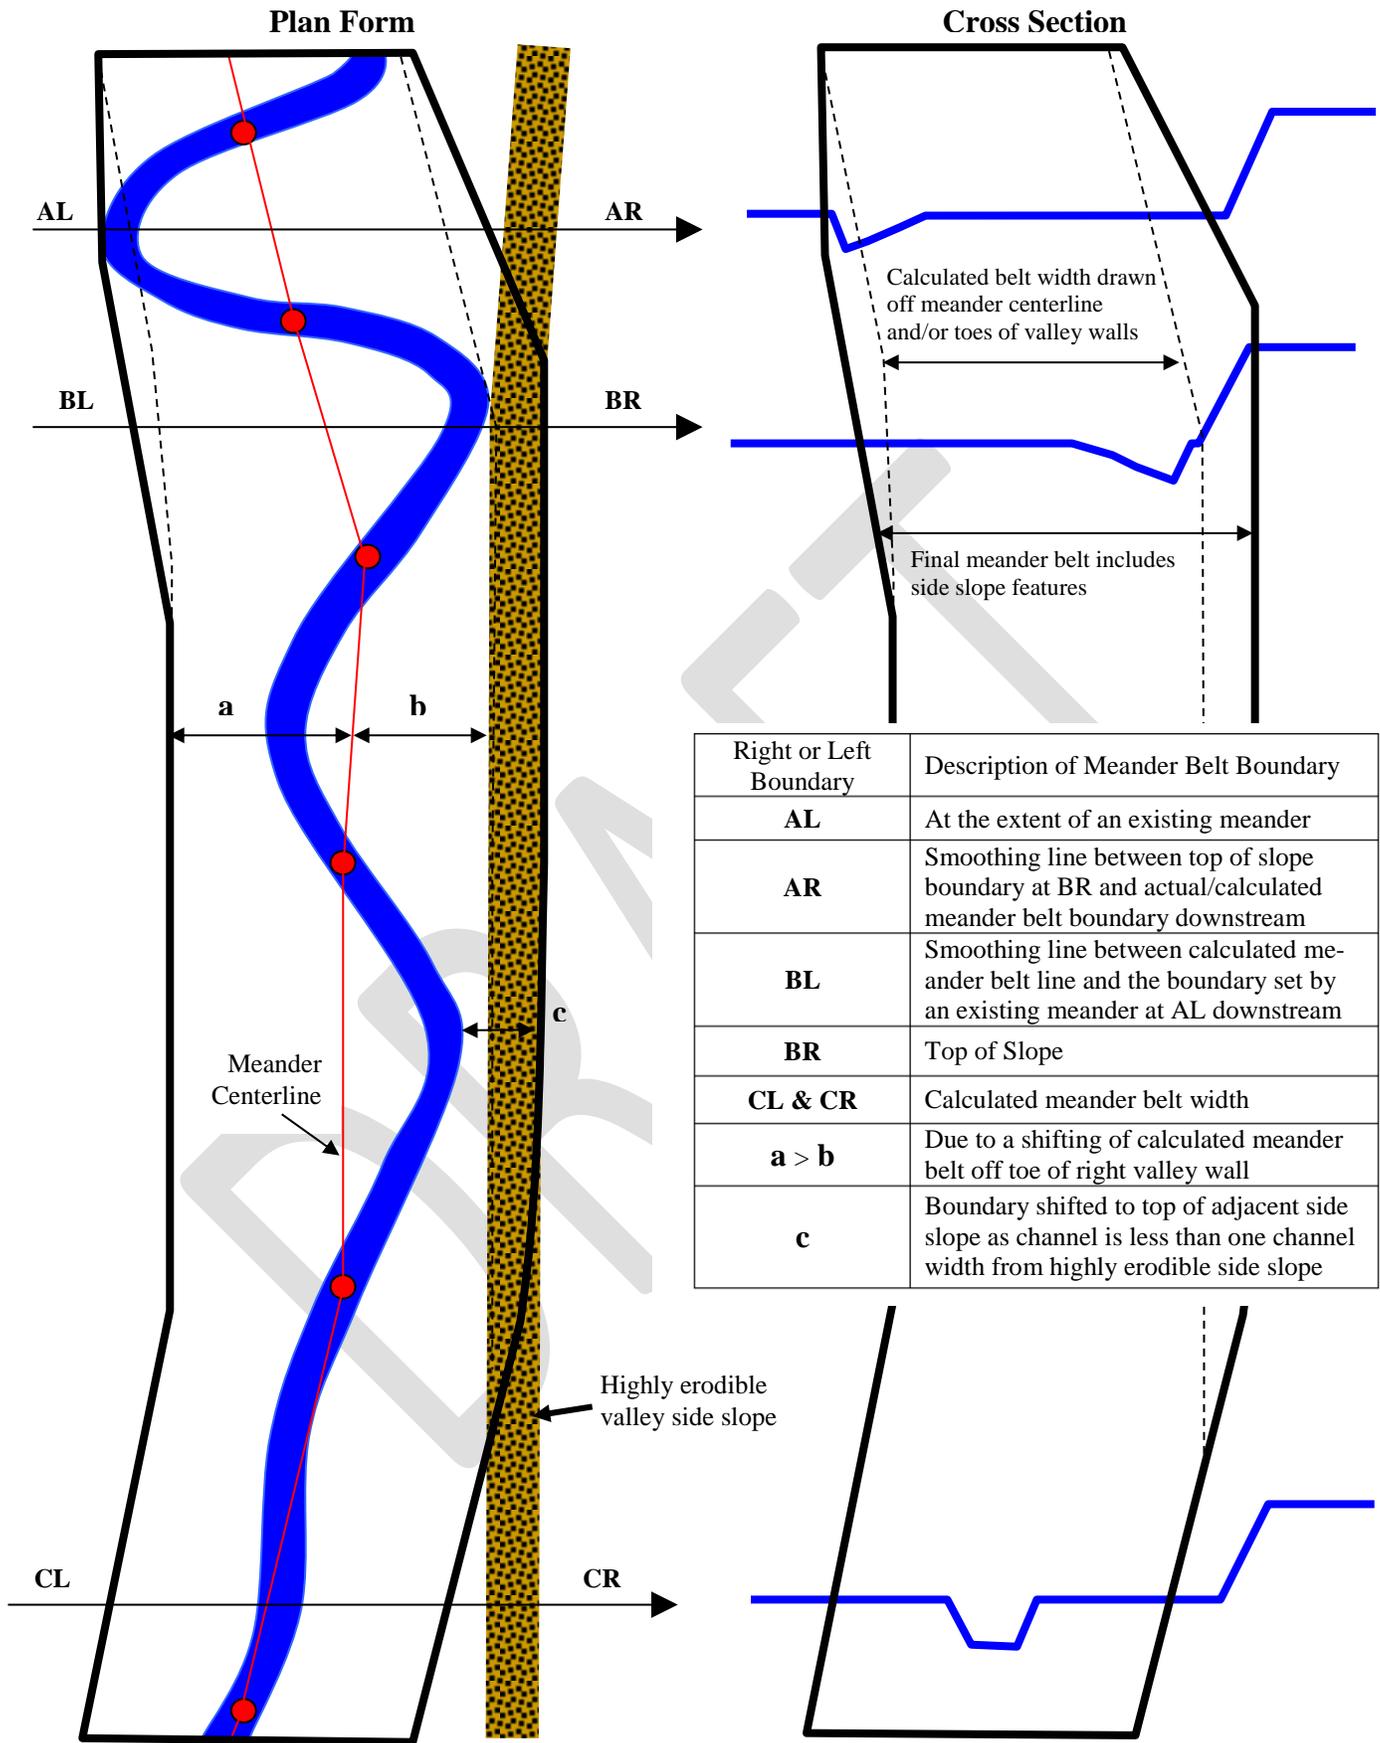


Figure 3. Planform and cross-sectional views of the meander belts used in constructing River Corridors and River Corridor Protection Areas (RCPA) based on a highly sensitive river type adjacent to a highly erodible valley side slope.

(c) **Procedure for the Statewide River Corridor Map Layer.**

- (1) Rivers and streams, with a drainage area greater than two square miles, shall have drawn corridors based on the criteria for stream sensitivity, riparian buffers, and confining features established in Section 4(b).
- (2) A Statewide River Corridor Layer shall depict the following map categories:
 - (A) simple top-of-bank setbacks indicated for streams with a drainage area of less than or equal to two square miles;
 - (B) river corridors (hereafter referred to as the *base layer or base map*) drawn using hydrographic and topographic data; and
 - (C) river corridors drawn with detailed field studies at the reach scale or the watershed scale, if field study data is available.
- (3) The river corridor base layer shall be ArcGIS derived from analysis of topographic data to calculate valley geometry (slope and width) and an analysis of hydrographic data to calculate hydraulic geometry and meander belt widths. As needed, the base layer may be field-verified using the principles of fluvial geomorphology as documented in the *DEC technical guidance*.
- (4) DEC shall, upon request, provide municipalities with maps depicting “river corridor protection areas” (10 V.S.A. §1422(19)) comprised only of the meander belt, without the 50 foot riparian buffer component. All streams on a “protection area” map shall indicate or depict a corridor that is at least as wide as the small stream setback described in Section 4(b)(1).

5.0 ADOPTION, AMENDMENT, AND REVISION OF MAPS

(a) **Introduction.** Flood hazard area maps are developed under the auspices of the NFIP as administered by FEMA. By contrast, river corridor maps are developed by the DEC River Corridor and Floodplain Management Program. The following sections describe how the two map types may be adopted by the Department and how they may be revised and amended. As a program unique to the state of Vermont, this Procedure is necessarily more detailed with respect to river corridor map adoption, revision, and amendment processes.

(b) **Flood Hazard Area Maps.**

(1) **Adoption & Applicability.**

Flood hazard areas shall be delineated in a manner consistent with the federal definition of “*area of special flood hazard*” (44 C.F.R § 59.1), in other words, that land in the floodplain within a community subject to a one percent or greater chance of flooding in any given year (10 V.S.A. § 752(3)).

(2) **Revision.**

(A) Requests for revisions to flood hazard area maps must be made through FEMA’s Letter of Map Revision (LOMR) process. A LOMR is FEMA’s modification to an effective

NFIP flood hazard area map.¹⁹

- (B) All requests for changes to effective maps, other than those initiated by FEMA, must be made to FEMA in writing by the chief executive officer (CEO) of the community or an official designated by the CEO. Pursuant to 44 C.F.R. Part 65, LOMRs must be noted on the community's master flood map and filed by panel number in an accessible location. All LOMR requirements are found at 44 C.F.R. Part 65- *Identification and Mapping of Special Flood Hazard Areas*.
- (C) While DEC may provide information and technical assistance on LOMR requirements, application must be made directly to FEMA. More information on the revision process is available by contacting the FEMA Map Information Exchange (FMIX) at 1-877-336-2627.

(3) **Amendment.**

- (A) Amendment to flood hazard areas must be made through FEMA's Letter of Map Amendment (LOMA) process. A LOMA is an official amendment, by letter, to an effective NFIP flood hazard area map. A LOMA establishes a property's location in relation to the flood hazard area. FEMA typically issues LOMAs when a property has been inadvertently mapped as being in the flood hazard area and, in actuality, is located on natural high ground above the base flood elevation.
- (B) Pursuant to 44 C.F.R. Part 70, LOMAs must be noted on the community's master flood map and filed by panel number in an accessible location. All LOMA requirements are found in 44 C.F.R. Part 70 – *Procedure for Map Correction*.
- (C) While DEC may provide information and technical assistance on LOMA requirements, application must be made directly to FEMA. More information on the amendment process is available by contacting the FEMA Map Information Exchange (FMIX) at 1-877-336-2627.

(c) **River Corridor Maps.**

(1) **Adoption.**

- (A) The Statewide River Corridor Map Layer, developed pursuant to Sections 4(b) and (c) above, shall be the official ANR river corridor map for purposes of planning and regulation.
- (B) The Statewide River Corridor Map shall be released for public review and comment for no less than a 30-day period. Web links to the map layer shall be posted on the DEC and ANR web pages. The Department shall send maps to and solicit comments from municipi-

¹⁹ LOMRs are generally based on the implementation of physical measures that affect the hydrologic or hydraulic characteristics of a flooding source and thus result in the modification of the existing regulatory floodway, the effective base flood elevations (BFEs), or the flood hazard area. The LOMR officially revises the flood hazard area, and sometimes the flood insurance study (FIS) report, and when appropriate, includes a description of the modifications. The LOMR is generally accompanied by an annotated copy of the affected portions of the flood hazard area map or FIS report.

palties, the Regional Planning Commissions, the Act 250 District Commissions, and other interested parties and shall provide a response summary and notify these jurisdictions when the State adopts the Statewide River Corridor Map layer.

(C) Upon adoption, the State shall publish the Statewide River Corridor Map Layer on the ANR Natural Resource Atlas.

(D) Municipalities may adopt the most current Statewide River Corridor Map into local zoning bylaws or as standalone bylaws.

(2) **Agency Process for Map Revision.**

(A) The Agency may conduct revisions on all or portions of the Statewide River Corridor Layer as needed (e.g., following major floods) and on a published schedule of watershed-scale revisions to incorporate Phase 2 stream geomorphic data and new local field studies²⁰ that are completed and provided to the Agency.

(B) Such revisions shall be noticed on the DEC and ANR web pages for public review and comment for a 30-day period. The Agency shall provide maps to and solicit comments from municipalities, the Regional Planning Commissions, the Act 250 District Commissions, and other interested parties and shall provide a response summary and notify these jurisdictions when the State adopts the Revised Statewide River Corridor Layer.

(C) Upon adoption, the State shall publish the revised Statewide River Corridor Map Layer on the ANR Natural Resource Atlas.

(3) **Municipal Process to Request Map Revision.**

(A) If a municipality has adopted a river corridor map as a regulatory overlay, the municipality may request administrative revisions to the state published maps to make the river corridor more compatible with existing development patterns and infrastructure. Requests for administrative revisions to the Statewide River Corridor Layer must be submitted by municipalities to DEC.

(B) The Agency shall approve administrative revisions if the revision upholds the overall objective of accommodating the stream channel processes and adjustments associated with stream equilibrium conditions at the reach and watershed scale. Situations for which a municipality may request administrative revisions include:

(i) adjusting the river corridor within a designated center if the municipality has adopted approved higher standards in the flood hazard area, has limited growth center location in light of known repetitive loss areas, and has adopted river corridor protections in the remainder of the municipality outside of designated centers;

(ii) shifting the river corridor to exclude a public utility, transportation infrastructure, or other improvements if the full width of the river meander belt can still be delimited by shifting the corridor to either side of the valley; or

²⁰ The DEC Technical Guidance for Floodplain and River Corridor Protection outlines methods for revising the base layer using field data from new or existing stream geomorphic assessments (SGA - Phase 2).

- (iii) adding other known flood prone or erosion hazard areas, such as landslides or alluvial fans, to the river corridor.
- (C) If any of the above revision types are requested singularly for isolated river segments, the Department may require the request to be submitted as a map amendment (see Sec. 5(c)(4)).
- (D) If the Agency approves the revision request, the Agency shall publish the administrative revision on the ANR Natural Resource Atlas and notify the affected municipalities, the Regional Planning Commission(s), and the Act 250 District Commissions.

(4) **Amendment.**

- (A) “Amendments” are technical changes which are project- or site-specific and fall into the categories of “minor amendments” and “major amendments.” “Major amendments” involve the collection of data and analysis to reevaluate stream sensitivity type or derive specific meander belt widths. “Minor amendments” include the correction of remnants from the mapping process, computer mapping errors, and single adjustments to factor in features documented with data (e.g., unmapped bedrock outcrop) unavailable when the base map was developed.
- (B) Requesting, Making, and Noticing Amendments. ANR may amend the base layer when state-sponsored or authorized field studies are completed at reach and smaller watershed scales. Amendments to the statewide river corridor layer may be requested by a municipality or other parties. DEC River Scientists may make and document amendments as they deem warranted, consider requests for minor amendments, and review applications for major amendments or certain types of minor amendments during project reviews. The Agency shall publish the amended maps on the ANR Natural Resource Atlas and notify the affected municipalities, the Regional Planning Commission(s), and the Act 250 District Commissions.
- (C) Applications for Map Amendments.
 - (i) Applications for map amendments must be accompanied by a qualified consultant’s rationale using qualified data such as those assessments outlined in the Agency’s Phase 2 and Phase 3 geomorphic assessment (SGA) protocols. Applications for major amendments must also document stream sensitivity type, and may be required to ascertain the equilibrium channel slope associated with an even distribution of stream power, sediment continuity, and vertical channel stability. Assessments must be based on methods outlined in *DEC technical guidance* or another prior-approved methodology.
 - (ii) The applicant shall be responsible for conducting the additional assessment and submitting proposed map amendments, with applicable fees, to DEC, with advisory copies to the local governing body, the Regional Planning Commission(s), and the Act 250 District Commissions.
 - (iii) Amendments preliminarily approved by DEC river scientists that now place adjacent property within the corridor belonging to owners other than the applicant, shall be

placed on public notice for a period of 10 business days before the amendment is finally approved and posted as part of the Statewide River Corridor Layer on the ANR Natural Resource Atlas.

- (iv) When map amendments become available on the Atlas, the Agency shall notify the municipalities, the Regional Planning Commissions, and Act 250 District Commissions.

(D) Major amendments may involve the analysis of:

- (i) Watershed Hydrologic Modifications including those natural processes and human activities or facilities which result in a significant **decrease** in peak discharges (e.g., flood control facilities); or significant watershed scale hydrologic modifications associated with, for example, land use conversion which raises peak discharges, as these activities serve to **increase** stream power, the level of erosion hazard, and stream sensitivity.
- (ii) Slope Modifications Related to Sediment Transport and Sediment Regime Changes. Meander belt modelling captures a range of watershed factors and natural channel conditions and enables the State to cost-effectively implement this Procedure statewide. However, project proponents and their consultants may propose a stream-specific equilibrium slope assessment for a geomorphically-defined stream reach which, if approved, could be conducted and provide data to calculate a stream reach-specific meander belt width. Amendments delimiting vertically stable “modified streams” (designated as moderate to low sensitivity) would fall into this category. A river corridor map amendment in consideration of a modified stream shall be limited to situations where the physical human constraints are so pervasive as to effectively preclude any expectation of re-establishing natural equilibrium conditions²¹, and where active erosion hazards (vertical channel adjustments), upstream and downstream of the human-constrained reach, are low or have been mitigated.
- (iii) Boundary Conditions. The resistance of the channel boundary materials to the erosive power of the stream as influenced by local conditions such as material type, size, and gradation; cohesiveness; and vegetation, or lack thereof, may significantly influence the anticipated range of channel adjustment and may therefore increase or decrease the level of erosion hazard, channel sensitivity, and river corridor extent. The role of human constructed channel stabilization treatments (such as rock rip rap) with respect to constraining channel adjustments, particularly in the absence of other improvements, will not be considered, because the typical long-term response to human-placed bank revetments is a higher rate of channel adjustment and an increased erosion hazard.
- (iv) Bank and Valley Side-Slope Failure / River-Associated Landslide Hazard. There are stream bank, landslide, and other erosion hazards that may exist at or beyond the boundaries of the meander belt. The river corridor may be extended beyond the top of the banks, slopes, or meander belt if there is evidence of active toe erosion or historic mass wasting failures. Determining an acceptable setback allowance to mitigate a

²¹ See the *Program Introduction*, page 7 for additional discussion of modified reference condition, http://www.watershedmanagement.vt.gov/rivers/docs/Educational%20Resources/rv_VermontRCMProgramDefinitionandApplicationofFluvialGeomorphology.pdf

slope or landslide hazard by evaluating the erosion rate of an exposed and actively eroding terrace or high bank does not capture the degree to which erosion could occur (Rapp, 2003). A Slope Stability Allowance (SSA) is an additional setback distance from the top-of-bank or top-of-adjacent side slope which may be added to the meander belt to mitigate damages and public safety concerns with respect to potential slope failure or landslide hazard (Table 1). The SSA is principally a function of the local soils and geologic materials present on the slope adjacent to the stream where the proposed development is to occur as well as any aggravating factors that could contribute to slope failure such as the incised or entrenched stream conditions, existing and proposed hydrologic conditions from groundwater, or stormwater runoff (Simon, 2003).

Table 1. Slope Stability Allowance (SSA)

Condition	Local Conditions of Side Slope	Options
1	Bedrock present in the floodprone area of the side slope (to an elevation 2X maximum channel depth).	Toe of the side slope represents the boundary of the River Corridor
2	Normal surficial materials present ²²	Calculate SSA as 2:1 slope measured from the toe of the slope ²³ or conduct a geotechnical analysis
3	Champlain lowland clayey surficial materials present ²⁴	Calculate SSA as 3:1 slope measured from the toe of the slope or conduct a geotechnical analysis

Note that a slope stability analysis must demonstrate that the proposed development will not require channelization practices, such as rock armoring, to maintain a stable slope.

6.0 ACT 250/SECTION 248 FLOODWAY DETERMINATIONS

- (a) The goal of Act 250 Criterion 1(D) is to promote the health, safety, and welfare of the public. 10 V.S.A. § 6086(a)(1)(D). The Secretary has determined that the Act 250 floodway includes areas associated with both flood inundation and fluvial erosion hazards. The Act 250 floodway limit is determined by considering the inundation hazards as delineated by the NFIP inundation maps (Flood Insurance Rate Maps, or FIRMs) **and** fluvial erosion hazards as delineated in river corridor maps.
- (b) For the purpose of determining the floodway under 10 V.S.A. § 6001(6), and the impacts of a project proposed to be built in a floodway under Criterion 1(D), DEC shall use the:
- (1) Flood hazard area as the Act 250 inundation floodway; and
 - (2) River corridor as the Act 250 erosion hazard floodway.
- (c) The flood hazard area includes the regulatory floodway and the flood fringe as mapped by the FEMA. River corridors are distinct from the NFIP inundation-based flood hazard areas mapped on the FIRMs and may apply to lands that lie outside of the regulatory inundation floodplain. Upon comparison of the two determinations (NFIP and DEC river corridors) the Act 250 floodway limit shall be whichever laterally extends farther from the stream.

²² “Normal surficial materials” include alluvium, ice-contact deposits, and glacio-lacustrine materials. See Appendix F in *SGA Handbooks* for more information and sources of geologic information in Vermont.

²³ Measure the setback, horizontally from the toe of the slope, at a distance two times the vertical height of the slope.

²⁴ Champlain lowland clayey materials include locations where glacio-marine deposits exist.

- (d) Where available, base flood elevations and floodway limits provided by the NFIP and in the most current flood insurance studies and accompanying maps shall be used to administer and enforce this Procedure. On rivers or lakes where base flood elevations and/or floodway limits *have not* been provided by the NFIP in the most current flood insurance studies and accompanying maps, it shall be the applicant's responsibility to develop the necessary data. Where available, the applicant shall use data provided by FEMA or state or federal agencies.
- (e) For proposals along rivers and streams with watershed areas greater than two square miles, and where a flood hazard area has not been mapped, the Secretary has the discretion to require base flood elevation and floodway data if documented flood damages or flood history exists indicating the risk of inundation hazards exist outside of the river corridor.
- (f) If a project satisfies this Procedure and Act 250 Criterion 1(D), it must still meet all the other Act 250 criteria, including Criterion 1(E) that may, for example, require the protection of riparian buffers²⁵ greater than 50 feet.
- (g) The Secretary shall apply this section when making recommendations to the Public Service Board regarding projects requiring permits under 30 V.S.A. §§ 248 or 248a.

7.0 DEC REGULATORY RECOMMENDATIONS

DEC shall make recommendations to the Act 250 District Commissions, the Natural Resources Board, the Public Service Board, municipalities, and other state regulatory programs according to the following standards.

- (a) **Projects Requiring an Act 250 Permit or Section 248 Certificate of Public Good.** If a project requiring Act 250/Section 248 review is proposed within the flood hazard area or river corridor (i.e. the Act 250 floodway), DEC shall recommend that the project meet the No Adverse Impact Standard to avoid restricting or diverting the flow of flood waters, and endangering the health, safety, and welfare of the public or of riparian owners during flooding.
 - (1) **No Adverse Impact Standard.**
 - (A) Except as provided in Section 7(a)(2), projects shall not include new fill, new structures, substantial excavations, and other improvements within the river corridor;
 - (B) A development shall not be located in the FEMA-designated floodway unless:
 - (i) Hydrologic and hydraulic analyses are performed in accordance with standard engineering practice, by a registered professional engineer, certifying that the proposed development will not increase base flood elevations or velocities. The Secretary has determined that hydrologic and hydraulic analyses conducted in accordance with

²⁵ For the purposes of Act 250 and Section 248, the Agency will make an explicit floodway determination and a separate vegetated buffer recommendation in accordance with the ANR Riparian Buffer Guidance (2005). ANR buffer recommendations will be informed by ANR River Corridor Maps. Agency buffer recommendations will indicate that setbacks, including at least the full river corridor (meander belt + buffer), are highly advisable to achieve and maintain equilibrium conditions and the other important buffer benefits articulated in the Buffer Guidance.

FEMA's *Guidelines and Standards for Risk Analysis and Mapping* are standard engineering practices, or

- (ii) Concurrence and approval are received from FEMA through the Conditional Letter of Map Revision review process confirming that the proposal meets the requirements of NFIP in 44 C.F.R. § 60.3(d)(3) or (4). Proposals receiving FEMA approval for encroachment in the floodway shall meet the requirements of Section 7(a)(3).

(C) Except as provided in Section 7(a)(2)(A), a development shall not decrease flood fringe storage capacity. New development that displaces floodwater storage in the flood hazard area must provide compensatory storage to offset the impacts of the proposal, when in the judgment of the Secretary, said loss will cause an increase or will contribute incrementally to an increase in the horizontal extent and level of flood waters during peak flows up to and including the base flood discharge. No Adverse Impact volumetric analysis and supporting data must be provided by the applicant and certified by a registered professional engineer.

(D) For a proposed development representing a particular risk to adjacent landowners, as determined by the Secretary, the Secretary may recommend a hydraulic analysis to verify that the proposal will not increase flood elevations or velocities for adjacent landowners. Hydraulic analyses and supporting data must be provided by the applicant and certified by a registered professional engineer.

(2) **No Adverse Impact – Exceptions.**

(A) Exceptions to the No Adverse Impact compensatory storage requirement within the flood fringe:

- (i) Proposals determined by ANR to have no more than a minimal effect on floodwater storage and do not divert floodwaters onto adjacent property. Examples of designs that have a minimal effect on floodwater storage include open foundation designs, utility work that is largely below grade, and minor above ground improvements such as fences or poles that minimally displace or divert floodwaters.
- (ii) Replacement structures provided that there is no increase in the structure's footprint.
- (iii) Replacement structures relocated to a location less proximal to the river within the river corridor or to a less hazardous location within the flood fringe provided that there is no increase in the structure's footprint.

(B) Exceptions to the No Adverse Impact requirement within the river corridor:

- (i) Redevelopment and infill development in state designated centers provided that the distance between the redevelopment or infill development and the river or stream is no less than the shortest distance between immediately adjacent existing above ground development and such river or stream.
- (ii) Bridges, culverts, utility crossings, and associated transportation and utility networks; dams; and functionally dependent uses that must be placed in or over rivers and streams. "Associated transportation and utility networks" means those transportation

and utility networks connected to a bridge, culvert, or utility for the purpose of crossing a river or stream and do not include transportation or utility networks within the river corridor that merely run parallel to a river or stream.

(iii) The replacement of improvements within the footprint of an existing improvement or immediately adjacent to an existing improvement of the same type and size that is being removed as a part of the redevelopment, provided that the replacement improvement is no closer to the river than the improvement of the same type that is being removed.

(iv)(a) In addition to the specific exceptions outlined in subdivisions (i) through (iii) above, development shall be allowed within the river corridor if the Secretary determines that the proposed development will not cause or contribute to fluvial erosion hazards. To make this determination the Secretary must apply the following River Corridor Performance Standard. The Secretary must find that a proposed development will:

- (1) not cause the river reach to depart from or further depart from the channel width, depth, meander pattern, and slope associated with natural stream processes and equilibrium conditions; and
- (2) not result in an immediate need or anticipated future need for stream channelization, as a result of the proposed development, that would increase flood elevations and velocities or alter the sediment regime triggering channel adjustments and erosion in adjacent and downstream locations.

(b) Development that meets the requirements of Appendix A or Appendix B of this Procedure satisfies the River Corridor Performance Standard outlined in this subdivision (Section 7(a)(2)(B)(iv)(a)).

(3) **Floodplain Management Standards.**

If the No Adverse Impact standard has been met, Agency technical staff shall, consistent with the requirements of 44 C.F.R. § 60.3, recommend that development be made reasonably safe from flooding and comply with all applicable floodplain management criteria of the NFIP. Technical staff shall make the following recommendations, unless the municipality in which the project is located has more stringent bylaws or ordinances, in which case, technical staff shall make recommendations consistent with those requirements. 24 V.S.A. § 4413(c).

- (i) Residential structures shall be elevated such that the lowest floor is at least two feet above the base flood elevation²⁶;
- (ii) Non-residential structures shall be elevated such that the lowest floor is at least two feet above the base flood elevation, or shall be dry-floodproofed and certified in accordance with FEMA floodproofing guidance to at least two feet above the base flood elevation;

²⁶ Residential Structures shall not have fully enclosed areas that are below grade on all sides (including below grade crawlspaces and basements)

- (iii) Critical facilities shall be elevated such that the lowest floor is elevated or floodproofed to at least the 500-year flood elevation or two feet above the base flood elevation, whichever is greater;
- (iv) Development shall be designed, operated, maintained, modified, and adequately anchored to prevent flotation, collapse, or lateral movement of the structure during the occurrence of the base flood;
- (v) Development shall be constructed with materials resistant to flood damage;²⁷
- (vi) Development shall be constructed by methods and practices that minimize flood damage;
- (vii) Development shall be constructed with waterproofed systems, such that electrical, heating, ventilation, plumbing, and air conditioning equipment and other service facilities are designed and/or located so as to prevent water from entering or accumulating within the design components during flooding.
- (viii) Development must be constructed with adequate drainage to reduce exposure to flood hazards; and
- (ix) Fuel storage tanks (as needed to serve buildings in the flood hazard area) must be located a minimum of one foot above the base flood elevation and be securely anchored to prevent flotation, and protected from flood forces and debris; or storage tanks may be placed above or below ground, if securely anchored and certified by a qualified professional that the design is watertight and will resist buoyancy, scour and uplift forces, and that the fuel storage tank vent is located at least one foot above the base flood elevation.

(b) **Projects subject to Municipal Hazard Area Regulations and submitted for DEC review.**

- (1) Municipalities that have adopted flood hazard area or river corridor bylaws are required to submit permit applications for flood hazard area and river corridor development to DEC, or DEC's designee, for review and comment pursuant to 24 V.S.A. § 4424(a)(2)(D). DEC shall review applications for completeness in accordance with the Development Review Checklist.²⁸ Incomplete applications will be returned to municipalities within 10 business days with the information deficiency noted.
- (2) **Flood Hazard Areas.** Upon receipt of a complete application, DEC shall review the development proposal against the effective Flood Insurance Study and flood hazard area map, in conjunction with the standards contained in the flood hazard area bylaw adopted by the municipality. DEC shall provide written comments with regard to any aspect of the proposal not in compliance with the municipal bylaw, provide recommended permit conditions to ensure the development complies with the adopted regulations, and recommend opportunities for enhanced regulation, if appropriate.
- (3) **River Corridors and River Corridor Protection Areas.** Upon receipt of a complete application, DEC shall review the application and recommend that river corridors be managed as

²⁷ Refer to FEMA Technical Bulletin 2-93: Flood-Resistant Materials Requirements.

²⁸ http://watershedmanagement.vt.gov/rivers/docs/nfip/rv_4424_checklist_final.pdf

“no fill, no build” zones, with allowances for development pursuant to the exception in Section 7(a)(2)(B).

(c) **Recommendations to Other State and Federal Programs and Interested Parties.**

- (1) The DEC River Corridor and Floodplain Management Program shall make recommendations to other regulatory, funding, and technical assistance programs consistent with the *No Adverse Impact Standard* as outlined in Sections 7(a)(1-3) above;
- (2) Other programs regulate development located within flood hazard areas and river corridors. The DEC River Corridor and Floodplain Management Program shall provide technical assistance and regulatory recommendations to a program, if its rules or regulations have been reviewed by the DEC River Corridor and Floodplain Management Program and found to meet the following performance standards:
 - (i) **Compensatory Storage Performance Standard.** Proposed development must provide for a volume of storage that ensures no increased risk to public safety by increasing the horizontal and vertical extent of floodwaters or increasing flood velocities. A positive finding may require the rule or regulation to include a requirement that a hydraulic analysis be submitted to the DEC River Corridor and Floodplain Management Program to verify that a proposed development will not increase flood elevations or velocities on floodwaters that would materially impact adjacent landowners.
 - (ii) **River Corridor Performance Standard.** Proposed development must provide for a meander belt and riparian buffer that ensures no increase in fluvial erosion hazards by causing the river reach to depart from or further depart from the channel width, depth, meander pattern, and slope associated with natural stream processes and equilibrium conditions. Proposed development shall not be approved if, as a result of the development, there is an immediate need or anticipated future need for stream channelization that would increase flood elevations and velocities or alter the sediment regime triggering channel adjustments and erosion in adjacent and downstream locations.

8.0 BEST MANAGEMENT PRACTICES IN FLOODPLAINS AND RIVER CORRIDORS

- (a) **Introduction.** This section of the Procedure includes best management practices for managing Vermont streams and rivers toward a dynamic equilibrium, i.e., geomorphic forms and fluvial processes which result in least erosive stream channels and functioning floodplains. Maximizing the use of these best management practices is in the interest of the landowner, the communities of a watershed, and the State as a whole. The benefits include a reduction in flood damages associated with inundation and fluvial erosion, storage of fine sediments and nutrients that may degrade Vermont waters, and more complex aquatic, wetland, and riparian habitats that support the most highly diverse communities of native plants and animals in this eco-region.

DEC provides technical assistance and works with partner agencies and organizations to complete river corridor plans and stormwater master plans which engender the technical analyses for identifying site-specific opportunities to implement the following best management practices. Municipalities and regional planning commissions are encouraged to identify both general and site-specific best practices in preparing local hazard mitigation plans and the resiliency elements of town plans. Local planning will affect the technical, regulatory, and funding assistance the State may provide for implementing local projects and practices.

The following sub-sections outline best practices for managing runoff, floodplain encroachments, river channels, and riparian buffers. Detailed descriptions of these practices are, in many cases, provided in separate best practice documents published by other state programs, including *technical guidance* documents published on the Watershed Management Division web pages. Presenting this set of references is intended to knit together these programs and practices into a single framework for managing floodplains and river corridors.

(b) **Best Management Practices.**

- (1) **Slowing, Spreading, and Infiltrating Runoff.** Stream and floodplain geometry are a function of watershed hydrology. Natural runoff characteristics may be altered by ditching, wetland loss, and changes in land use and land cover. When runoff is quickened and peak discharges are increased, flood water depths are increased. A stream receiving runoff from ditched lands or a watershed with impervious cover exceeding 5% may become energized, erosive, enlarged, and unstable (Fitzgerald, 2007; Doyle et al., 2000). Best practices to minimize the stream disequilibrium associated with altered hydrology involve slowing, spreading, and infiltrating runoff from urban, farm, and working forest lands and transportation networks. *DEC technical guidance* for stormwater management and ecosystem restoration lists and describes current programs outlining the best management practices for watershed hydrology. In general, natural systems such as vegetative cover, organic soils, land forms (e.g., wetlands and floodplains) that store and more slowly release runoff are the preferred, least cost and self-maintaining systems for stormwater treatment.
- (2) **Avoiding and Removing Encroachments.** Investments placed within flood hazard areas and river corridors inevitably result in human-imposed structural constraints on flood waters and stream channel adjustments to protect those investments and address associated threats to public safety. Typically, the constraint of flooding and channel adjustments in one location results in a transfer of flood water, stream sediments, and erosive energy to another location. Structural flood works to protect encroachments can increase flood elevations and velocities and trigger a sequence of channel adjustments and erosion in adjacent and downstream locations, especially when placed in and adjacent to sensitive (i.e., high-bed load, alluvial) stream types. Avoiding new development and removing existing structures within floodplains and river corridors will begin to mitigate these impacts.
 - (A) **Land use planning and regulation.** Best management practices for planning developments exempt from municipal regulation or those subject to Act 250/Section 248 are guided by the “No Adverse Impact” standard for flood hazard areas and river corridors as established in this Procedure and the Flood Hazard Area and River Corridor Rule. The adoption of local land use plans and regulations are also critical best management practices. Municipalities implement best practices by adopting land use bylaws with development standards which exceed the minimum requirements of the NFIP. The Department highly recommends that municipalities submit proposed bylaw language to the River Corridor and Floodplain Management Program for review and comment. The Program has published model bylaws for municipal regulation of development in flood hazard areas, river corridors, and river corridor protection areas on its web pages.

See: http://www.watershedmanagement.vt.gov/rivers/htm/rv_floodhazard.htm

- (B) **Land conservation.** River corridor protection, in the form of an easement or fee purchase, often represents a feasible alternative to channelization practices. River corridor easements have been designed to augment municipal bylaws. Zoning may avoid future encroachment and minimize fluvial erosion hazards, but does not restrict channel straightening and armoring practices that transfer flood-related erosion to downstream locations.

Obtaining an easement to protect rather than stop the erosion process and allow floodplains to reestablish in selected locations is a best management practice to protect soils, property, and infrastructure at the location of the easement and at properties lower in the watershed. Wherever feasible, the capture and storage of water, sediment, and debris in natural floodplain features will reduce flood hazards and promote the ecological health of our rivers (*ANR Guide to River Corridor Easements 2010*).

Securing a river corridor easement may be the most viable river management alternative if: (i) the sediment deposition process is dominating and/or is critical to the development and maintenance of equilibrium channel forms (i.e., stable meanders, river beds and banks); (ii) channel and corridor constraints do not currently limit meander and channel slope adjustments; (iii) existing and future proposed activities have been identified that would constrain or otherwise threaten the attainment of equilibrium conditions; and (iv) protecting the erosion/deposition process in the easement area may help minimize the erosion hazards to downstream areas.

See: http://www.watershedmanagement.vt.gov/rivers/docs/rv_RiverCorridorEasementGuide.pdf

- (C) **Removal of structures.** Each year, whether from flood damage, disuse, or disrepair, determinations are made that certain structures require major investments to restore the function for which they were originally built. In these situations, best practice involves an alternatives analysis to determine the feasibility of moving or deconstructing the river corridor or floodplain encroachment. For instance, there is typically a high benefit-cost ratio for removing a repetitive-damage structure. State and federal agencies have maintained buy-out and restoration programs and typically require the long-term protection of the site upon removal of the structure.

Planning programs which identify and target derelict and vulnerable structures for removal, based on documented flood and fluvial erosion hazard mitigation objectives, will be most successful in obtaining funding assistance for the removal of structures.

In addition to home buy-outs, there may be road setbacks that are worthy of consideration. Systemic restoration of floodplain function may also be achieved through the removal of derelict dams and under-sized stream crossings, which often restores the sediment transport functions critical to stream bed elevations and floodplain connectivity. Berm and levee removals have perhaps the highest benefit-cost ratio. Some levees are still protecting residences and infrastructure, but many others, particularly old berms, protect very little in comparison with the increased risk they create from increasing flood heights and velocities.

(3) **River and Riparian Management.**

(A) **Meeting equilibrium and connectivity standards.** DEC has prepared a compendium of *Standard River Management Principles and Practices* to support more effective flood recovery implementation; improve the practice of river management; and codify best river management practices in Vermont. The document compiles the most current river management practices based on the best available science and engineering methods to create consistent practice and language for risk reduction while maintaining river and floodplain function. Best practices are established to address common flood damages, including:

- (i) Erosion of banks adjacent to houses and infrastructure;
- (ii) Erosion of road embankments;
- (iii) Channel movement across the river corridor;
- (iv) River bed down-cutting that destabilizes banks, undermines structure foundations, exposes utility crossings, and vertically disconnects rivers from adjacent floodplains;
- (v) River bed sediment build-up that can increase flood depths, initiate channel movement and avulsion, and lead to bank erosion;
- (vi) River bed filling with large woody debris that can increase flood depths, initiate channel movement and avulsion, and lead to bank erosion; and
- (vii) Bridge and culvert failure.

See: http://www.watershedmanagement.vt.gov/permits/htm/pm_streamcrossing.htm

In addition to the standard river management practices, the *Principles and Practices* document includes a site screening and problem identification process as well as methods for conducting an alternatives analysis. Other best practices for restoring stream channels and floodplains toward equilibrium conditions are identified in River Corridor Plans completed using Phase 1 and Phase 2 Stream Geomorphic Assessment data. The ANR River Corridor Planning Guide offers methods for creating best practices around:

- (i) Actively restoring and protecting floodplain functions and features;
- (ii) Removing constraints to the natural sediment and hydrological regimes (e.g., berms, derelict dams, or undersized culverts)
- (iii) Maintaining those stream dimensions, pattern, and slope presently in equilibrium condition; and
- (iv) Reconstructing the channel dimensions, pattern, and slope associated with equilibrium conditions.

River corridor plans identify reach-specific restoration projects, including: stabilizing streambanks (i.e., on a laterally-adjusting, equilibrium stream); arresting head-cuts and nick-points; removing berms and other constraints to flood and sediment load attenuation; removing/replacing structures (e.g. undersized culverts, constrictions, low dams); restoring incised reaches; and restoring aggraded reaches. Where feasible, river corridor best management practices include the removal of structures and modification of landforms that constrain or obstruct fluvial processes to restore and maintain vertical connectivity between a channel and adjacent floodplains. Opportunities to couple active restoration with river corridor protection should be pursued.

See: http://www.watershedmanagement.vt.gov/rivers/docs/rv_rivercorridorguide.pdf

- (B) **Restoring and maintaining riparian buffers.** This Procedure: (i) defines a 50 foot setback extension on either side of the meander belt component of a river corridor to provide space for buffers adjacent to the stream when meanders have reached an equilibrium slope and planform, and (ii) recommends the maintenance of an undisturbed 50 foot vegetated buffer as measured from the top of bank or top of slope, consistent with the Agency's Riparian Buffer Guidance (2005).

The 50 foot distance was chosen as the minimum ANR recommended vegetated buffer distance within the river corridor to give resistance to fluvial erosion and increase the stream bank stability necessary to achieve and maintain equilibrium conditions. Other buffer functions and distances are spelled out in the Guidance and supported in the ANR Riparian Buffers and Corridors Technical Papers (2005). The Agency may recommend vegetated buffers on existing channels beyond those provided for in the river corridor setbacks to ensure that other buffer functions are maintained and protected.

The best practice is for riparian buffers to be managed as “undisturbed” areas, meaning the complete avoidance of earth-moving activities; the storage of materials; the removal of trees, shrubs, or groundcover; and mowing.

See: <http://www.anr.state.vt.us/site/html/buff/anrbuffer2005.htm>.

9.0 DEFINITIONS

“Accessory structure” means a structure which is: (1) detached from and clearly incidental and subordinate to the principal use of or structure on a lot, (2) located on the same lot as the principal structure or use, and (3) clearly and customarily related to the principal structure or use.

“Act 250 floodway” means a hazard area with inundation and fluvial erosion components. The inundation component is the special flood hazard area as mapped by the FEMA and includes the floodway and flood fringe. The fluvial erosion component is the river corridor as mapped by the Agency.

“Agency” or “ANR” means the Vermont Agency of Natural Resources.

“Base Flood” means the flood having a one percent chance of being equaled or exceeded in any given year (commonly referred to as the “100-year flood”).

“Base Flood Elevation” (BFE) means the elevation of the water surface elevation resulting from a flood that has a one percent chance of equaling or exceeding that level in any given year. On the Flood Insurance Rate Map the elevation is usually in feet, in relation to the National Geodetic Vertical Datum of 1929, the North American Vertical Datum of 1988, or other datum referenced in the Flood Insurance Study report, or the average depth of the base flood, usually in feet, above the ground surface.

“Basement” means any area of the building having its floor elevation below ground level on all sides including crawlspaces.

“Base Layer/Base Map” means the statewide river corridor map layer published and maintained by the agency in accordance with this Procedure.

“BFE” see Base Flood Elevation.

“Below Ground Improvement” means a private, functioning potable water or wastewater system providing service to a habitable structure or an underground public utility that is functioning and providing a public service.

“Buffer” means an undisturbed area consisting of trees, shrubs, ground cover plants, duff layer, and generally uneven ground surface that extends a specified distance horizontally across the surface of the land from the mean water level of an adjacent lake or from the top of the bank of an adjacent river or stream, as determined by the Secretary of Natural Resources.

“Channel” means an area that contains continuously or periodic flowing water that is confined by banks and a streambed.

“Channelization” practices conducted in a stream channel and/or the floodplain, including straightening, berming, dredging, and/or armoring, which alter flow depths, slope, and velocities and the sediment regime of the stream.

“Compensatory storage” means a volume not previously used for flood storage and which shall be incrementally equal to the theoretical volume of flood water at each elevation, up to and including the base flood elevation, which would be displaced by the proposed project. Such compensatory volume shall have an unrestricted hydraulic connection to the same waterway or water body. Further, with respect to waterways such compensatory volume shall be provided within the same reach of the river, stream, or creek.

“Critical facilities” means facilities that provide services or functions related to public health and safety during emergency response and recovery and facilities that must be protected to a higher standard to protect public health and safety.

“Designated center” means a downtown, village center, new town center, growth center, or neighborhood development area designated pursuant to 24 V.S.A. Chapter 76A.

“Development” means any human-made change to improved or unimproved real estate including buildings or other structures, mining, dredging, filling, grading, paving, excavation or drilling operations, or storage of equipment or materials.

“Equilibrium conditions” means the width, depth, meander pattern, and longitudinal slope of a stream channel that occurs when water flow, sediment, and woody debris are transported by the stream in such a manner that it generally maintains dimensions, pattern, and slope without unnaturally aggrading or degrading the channel bed elevation.

“FEMA” means the Federal Emergency Management Agency.

“Fill” means any placed material that changes the natural grade, increases the elevation, or diminishes the flood storage capacity at a site. Temporary storage of material is not considered fill.

“FIRM” see Flood Insurance Rate Map.

“Flood” means (1) a general and temporary condition of partial or complete inundation of normally dry land areas from: (A) the overflow of inland or tidal waters; (B) the unusual and rapid accumulation or runoff of surface waters from any source; or (C) mudslides which are proximately caused by flooding and are akin to a river of liquid and flowing mud on the surfaces of normally dry land areas, as when earth is carried by a current of water and deposited along the path of the current; or (2) the collapse or subsidence of land along the shore of a lake or other body of water as a result of erosion or undermining caused by waves or currents of water exceeding anticipated cyclical levels or suddenly caused by an unusually high water level in a natural body of water, accompanied by a severe storm, or by an unanticipated force of nature, such as flash flood or abnormal tidal surge, or by some similarly unusual and unforeseeable event which results in flooding.

“Floodplain” means any land area susceptible to being inundated by water from any source (see definition of “Flood”).

“Flood fringe” means the area that is outside of the regulatory floodway but still inundated by the designated base flood (the flood having a one percent chance of being equaled or exceeded in any given year).

“Flood hazard” means those hazards related to inundation damages.

“Flood hazard area” means the land in the floodplain within a community subject to a one percent or greater chance of flooding in any given year. The term has the same meaning as “area of special flood hazard” under 44 C.F.R. § 59.1.

“Flood Insurance Rate Map” (FIRM) means an official map of a community on which the Federal Insurance Administrator has delineated both the special flood hazard areas and the risk premium zones applicable to the community.

“Flood insurance study” means an examination, evaluation, and determination of flood hazards and, if appropriate, the corresponding water surface elevations or an examination, evaluation, and determination of mudslide (i.e., mudflow) and/or flood related erosion hazards.

“Flood proofing” means any combination of structural and non-structural additions, changes, or adjustments to structures which reduce or eliminate flood damage to real estate or improved real property, water and sanitary facilities, structures, and their contents.

“FEMA--designated floodway” or “regulatory floodway” means the channel of a river or other water-course and the adjacent land areas that must be reserved in order to discharge the base flood without cumulatively increasing the water surface elevation more than one foot at any point as depicted on Flood Insurance Rate Maps published by FEMA. Flood hazard areas and floodways may be shown on separate map panels.

“Fluvial erosion hazards” means those hazards related to the erosion or scouring of riverbeds and banks during high flow conditions of a river.

“Functionally dependent use” means a use which cannot perform its intended purpose unless it is located or carried out in close *proximity to water* (e.g., *bridges and public accesses to the water*).

“Habitable Structure” means any enclosed roofed structure; residential, commercial, or industrial; public or private, that is fit for people to enter and utilize.

“Handbooks” mean the Phase I-III Vermont Stream Geomorphic Assessment (SGA) Handbooks DEC, 2009)

“Historic Structure” means any structure that is: (1) listed individually in the National Register of Historic Places (a listing maintained by the Department of the Interior) or preliminarily determined by the Secretary of the Interior as meeting the requirements for individual listing on the National Register; (2) certified or preliminarily determined by the Secretary of the Interior as contributing to the historical significance of a registered historic district or a district preliminarily determined by the Secretary to qualify as a registered historic district; (3) individually listed on a state inventory of historic places in states with historic preservation programs which have been approved by the Secretary of the Interior; or (4) individually listed on a local inventory of historic places in communities with historic preservation programs that have been certified either: (A) by an approved state program as determined by the Secretary of the Interior or (B) directly by the Secretary of the Interior in states without approved programs.

“Improvement” means a habitable structure, accessory structure, public utility, public transportation infrastructure, or a private road, bridge, culvert, or utility (i.e., potable water well or waste water system) providing for the use of or primary access to residential and/or commercial property. For the purpose of this Procedure, “existing improvements” are those in existence as of the date this Procedure was adopted.

“Infill development” means construction, installation, modification, renovation, or rehabilitation of land, interests in land, buildings, structures, facilities or other improvements in an area that was not previously developed but it surrounded by existing development.

“Letter of Map Amendment” (LOMA) is a letter issued by FEMA officially removing a structure or lot from the flood hazard area based on information provided by a certified engineer or surveyor. This is used where structures or lots are located above the base flood elevation and have been inadvertently included in the mapped special flood hazard area.

“Lowest floor” means the lowest floor of the lowest enclosed area of a building, including the basement, except an above grade unfinished or flood resistant enclosure, usable solely for parking of vehicles, building access, or storage in an area other than a basement area is not considered a building’s lowest floor provided that such enclosure is not built so as to render the structure in violation of the applicable non-elevation design requirements of 44 C.F.R. § 60.3.

“Meander belt” means the land area on either side of a watercourse extending laterally across the river valley which represents a minimal corridor for the lateral meander extension and migration necessary to maintain an equilibrium slope and minimize vertical channel instability and erosion over time.

“New construction” means structures for which the *start of construction* commenced on or after the effective date of the floodplain management regulation adopted by the community and includes any subsequent improvements to such structures.

“NFIP” means the National Flood Insurance Program.

“Redevelopment” means construction, installation, modification, renovation, or rehabilitation of land, interests in land, buildings, structures, facilities, or other improvements in a previously developed area. The term includes substantial improvements and repairs to substantially damaged buildings.

“Replacement structure” means a new building placed in the same location, footprint, and orientation as the pre-existing building.

“River corridor” means the land area adjacent to a river that is required to accommodate the dimensions, slope, planform, and buffer of the naturally stable channel and that is necessary for the natural maintenance or natural restoration of a dynamic equilibrium condition and for minimization of fluvial erosion hazards, as delineated by the Agency in accordance with the ANR River Corridor Protection Procedures.²⁹ 10 V.S.A. § 1422(12).

“River corridor protection area” means the area within a delineated river corridor subject to fluvial erosion that may occur as a river establishes and maintains the dimensions, pattern, and profile associated with its dynamic equilibrium condition and that would represent a hazard to life, property, and infrastructure placed within the area. The river corridor protection area is the meander belt portion of the river corridor without an additional allowance for riparian buffers.

“Secretary” means the Secretary of Natural Resources or his or her authorized representative.

“Sediment regime” means the size, quantity, sorting, and distribution of sediments, which may differ between stream types due to their proximity to different sediment sources, their hydrologic regime, their stream, riparian and floodplain connectivity, and valley and stream morphology.

“Special flood hazard area” is synonymous with “flood hazard area” and “area of special flood hazard” (44 C.F.R. § 59.1) and is the floodplain within a community subject to a one percent or greater chance of flooding in any given year. This area is usually labeled Zone A, AO, AH, AE, or A1-30 in the most current flood insurance studies and on the maps published by FEMA. Base flood elevations have not been determined in Zone A where the flood risk has been mapped by approximate methods. Base flood elevations are shown at selected intervals on maps of special flood hazard areas that are determined by detailed methods. Please note, where floodways have been determined they may be shown on separate map panels from the Flood Insurance Rate Maps.

²⁹ These Procedures incorporate the river corridor delineation process defined in the ANR Flood Hazard Area and River Corridor Technical Guide available at:

http://www.watershedmanagement.vt.gov/rivers/htm/rv_restoration.htm

“Start of construction” includes substantial improvements, and means the date the building permit was issued provided the actual start of construction, repair, reconstruction, rehabilitation, addition placement, or other improvement was within 180 days of the permit date. The actual start means either the first placement of permanent construction of a structure on a site, such as the pouring of slab or footings, the installation of piles, the construction of columns, or any work beyond the stage of excavation. Permanent construction does not include land preparation, such as clearing, grading and filling; nor does it include the installation of streets and/or walkways; nor does it include excavation for a basement, footing, piers, or foundations or the erection of temporary forms; nor does it include the installation on the property of accessory buildings, such as garages or sheds not occupied as dwelling units or not part of the main structure. For a substantial improvement the actual start of construction means the first alteration of any wall, ceiling, floor, or other structural part of a building, regardless of whether that alteration affects the external dimensions of the building.

“Structure” means a walled and roofed building, as well as a manufactured home, including gas or liquid storage tanks.

“Substantial damage” means damage of any origin sustained by a structure whereby the cost of restoring the structure to its before-damaged condition would equal or exceed 50 percent of the market value of the structure before the damage occurred.

“Substantial improvement” means any reconstruction, rehabilitation, addition, replacement, or other improvement of a structure for which a building permit is issued after the date of adoption of this Procedure, the cost of which, over five years, cumulatively equals or exceeds 50 percent of the market value of the structure before the “start of construction” of the improvement. This term includes structures which have incurred “substantial damage”, regardless of the actual repair work performed. The term does not, however, include either: (1) any project for improvement of a structure to correct existing violations of state or local health, sanitary, or safety code specification which have been identified by the local code enforcement official and which are the minimum necessary to assure safe living conditions or (2) any alteration of a “historic structure”, provided that the alteration will not preclude the structure’s continued designation as a “historic structure”.

“Utility network” means above or below ground linear facilities subject to 30 V.S.A. § 248 or 248a.

“Watercourse” means any perennial stream and shall not include ditches or other constructed channels primarily associated with land drainage or water conveyance through or around private or public infrastructure.

11.0 REFERENCES

- Brierley, G.J., and K.A. Fryirs. 2005. *Geomorphology and River Management: Applications of the River Styles Framework*. Blackwell Publishing.
- Brookes, A. 1988. *Channelized Rivers; Perspectives for Environmental Management*. John Wiley & Sons, Chichester.
- Doyle, M.W., C.F. Rich, J.M. Harbor and A. Spacie. 2000. Examining the Effects of Urbanization on Streams Using Indicators of Geomorphic Stability. *Physical Geography*. 2000, 21(2) 155-181.
- Federal Emergency Management Agency (FEMA). 1999. *Riverine Erosion Hazard Areas Mapping Feasibility Study*. Hazards Study Branch, Technical Services Division, FEMA.

- Finkenbine, J.K., et al. 2000. Stream Health after Urbanization. *Journal of the American Water Resources Association*, 36(5): 1149-1160.
- Fitzgerald, E. 2007. Linking Urbanization To Stream Geomorphology And Biotic Integrity In The Lake Champlain Basin, Vermont. Master's Thesis. University of Vermont. Burlington, VT
- Galloway, G.E., et al. Assessing the Adequacy of the National Flood Insurance Program's 1 Percent Flood Standard. Water Policy Collaborative, University of Maryland, American Institutes for Research, October 2006.
- Huggett, R.J., 2003. Fundamentals of Geomorphology. Routledge Fundamentals Physical Geography.
- Kline, M., C. Alexander, S. Pytlik, S. Jaquith and S. Pomeroy. 2007. Vermont Stream Geomorphic Assessment Protocol Handbooks. Vermont Agency of Natural Resources, Waterbury, VT.*
- Kline, M. 2007. Vermont ANR River Corridor Planning Guide. Vermont Agency of Natural Resources, Waterbury, VT.*
- Lane, E.W. 1955. The Importance of Fluvial Morphology in Hydraulic Engineering. Proceedings of the American Society of Civil Engineers, Journal of the Hydraulics Division, vol. 81, paper no. 745.
- Lane, S. 1995. The Dynamics of Dynamic River Channels. *Physical Geography Now*. Geography, Volume 80(2), Pages 147-162.
- Leopold, L.B. 1994. A View of the River. Harvard University Press, Cambridge, MA.
- Piegay, H. et al. 2005. A Review of Techniques Available for Delimiting the Erodible River Corridor: A Sustainable Approach to Managing Bank Erosion. John Wiley and Sons, River Res. Applic. 21: 773-789.
- Rapp, C.F, et al. 2003. A Framework for Delineating Channel Migration Zones. Washington State Department of Ecology and DOT, Ecology Final Draft Publication #03-06-027.
- Riley, Ann L. 1998. Restoring Streams in Cities: A Guide for Planners, Policymakers and Citizens. Washington DC: Island Press. p. 137. [ISBN 1559630426](#).
- Rosgen, D.L. 1996. Applied River Morphology. Wildland Hydrology. Pagosa Springs, CO.
- Simon, A., et al. 2006. Disturbance, stream incision, and channel evolution: The roles of excess transport capacity and boundary materials in controlling channel response. *Geomorphology* 79 (2006) 361-383.
- Simon, A., et al. 2003. Lake Tahoe Basin Framework Implementation Study: Sediment Loadings and Channel Erosion. National Sedimentation Laboratory Technical Report 39, USDA-ARS National Sedimentation Laboratory, Oxford, MS.
- Thorne, C.R., R.D. Hey, and M.D. Newson. 1997. Applied Fluvial Geomorphology for River Engineering and Management. John Wiley and Sons, Chichester, UK.

Thorne, C.R. 1998. Stream Reconnaissance Handbook: Geomorphological Investigation and Analysis of River Channels. John Wiley & Sons, Chichester, England.

Springston, G., 2007. Vermont Stream Bank Stability Manual, Draft, Norwich University, May 2, 2007.

Ward, A.D. (2007). Technical supplement 14S: Sizing Stream Setbacks to Help Maintain Stream Stability. In *USDA-NRCS National Engineering Handbook Part 654 Stream Restoration Design*.

Ward, A. et al. 2002. Sizing Stream Setbacks to Help Maintain Stream Stability. The Society of Engineering in Agricultural, Food, and Biological Systems. 2002 ASAE International Mtg, Chicago, IL.

Ward, A. 2001. Stream Stability Protection Setback. Ohio State University.

Williams, G.P. 1986. River Meanders and Channel Size. *Journal of Hydrology* 88:147-164.

*Publications of the Vermont Agency of Natural Resource, River Management Program staff are published at: <http://www.watershedmanagement.vt.gov/rivers.htm>

Dated this ____ day of _____ 2014 at Montpelier, Vermont.

David K. Mears, Commissioner
Department of Environmental Conservation

Appendix A

Exception to the River Corridor No Adverse Impact Standard for Improvements Between Existing Improvements (See Section 7(a)(2)(B)(iv)(b))

- (a) **Background.** In situations where existing improvements within the river corridor are in close proximity to one-another, there may be constraints (i.e., river channel management) on the extent of lateral river channel migration. Improvements between existing improvements in close proximity to one another are not expected to increase existing fluvial erosion hazards because the new improvements will not result in further channelization practice.
- (b) **Standard.** Improvements may be admissible between existing improvements, but must not: (i) increase the existing level of fluvial erosion hazard or (ii) result in an increase in the length of channel management or bank stabilization measures that may be sought to protect the existing improvements in the future (in the event such property is threatened by fluvial erosion). To meet these performance standards, improvements may be permitted within the river corridor under the following conditions:
- (1) Improvements must be located no closer to the river than a line as drawn between the two points nearest to the top of the bank (as measured horizontally) of the two existing, adjacent, above ground improvements, and
 - (2) Improvements must be located between or behind existing above ground improvements, which are no further than 300 ft. from one-another (Figure 4). The area behind existing above ground improvements shall be determined by finding the most upstream point and the most downstream point of the two improvements and then drawing a line from each of those two points away from and perpendicular to the river.

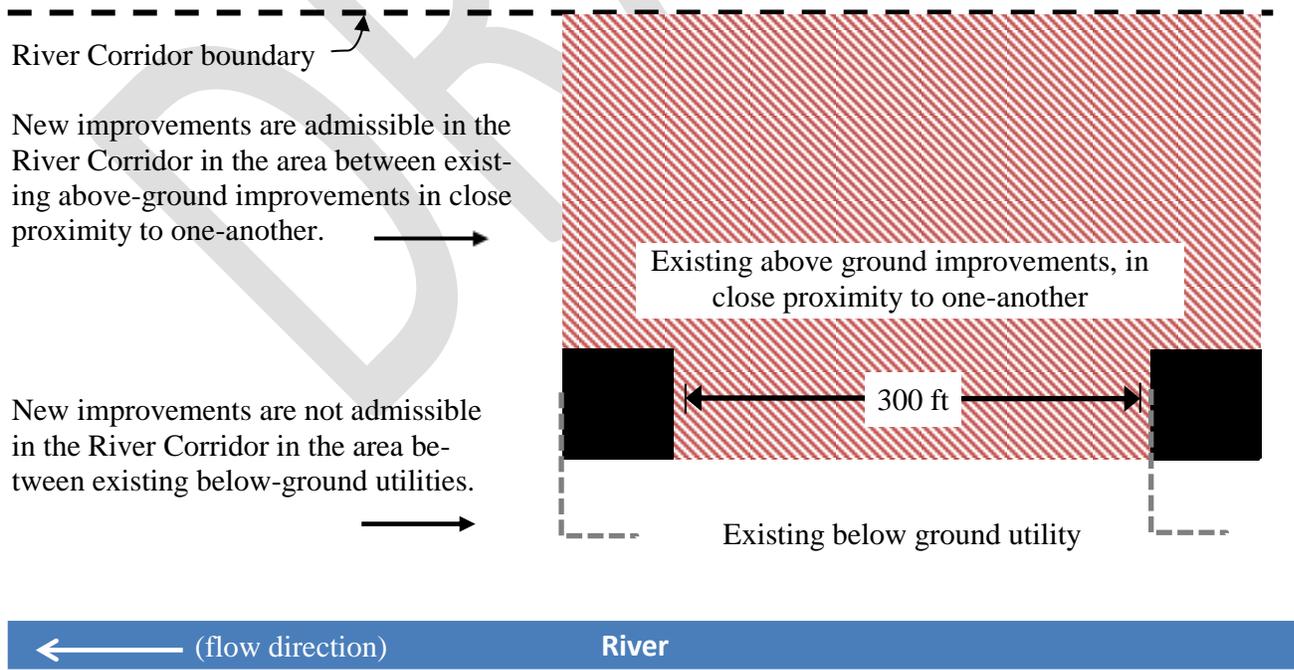


Figure 4. Red cross-hatched are showing where new improvements may be permitted between two existing above ground improvements no more than 300 feet apart. This area for acceptable improvement may be considered in tandem with the shadow areas defined in Appendix B.

Appendix B

Exception to the River Corridor No Adverse Impact Standard for Improvements in the Down-River Shadow of an Existing Improvement (See Section 7(a)(2)(B)(iv)(b))

- (a) **Background.** In situations where there is an existing improvement within the river corridor, isolated from other improvements, there may be constraints on the extent of lateral river channel migration. Limited improvements in the shadow of existing improvements are not expected to increase the level of fluvial erosion hazard.
- (b) **Standard.** Improvements must not: (i) increase the existing level of fluvial erosion hazard, or (ii) result in an increase in the length of channel management or bank stabilization measures that may be sought to protect existing improvements in the future (in the event such property is threatened by fluvial erosion).
- (1) To meet these performance standards, proposed improvement limited to accessory structures, additions to existing habitable structures, or utilities may be permitted within the river corridor under the following conditions:
- (A) Limited improvements must be located no closer to the river than any existing above ground improvement as measured horizontally from the above ground point of the improvement nearest to the top of bank, and
 - (B) Limited improvements must be located behind the existing above ground improvement or may extend down valley from the existing above ground improvement up to 50 ft. from the most river-proximal, down-valley corner of the existing above ground improvement (Figure 5). The area behind an existing above ground improvement shall be determined by finding the most upstream point of the existing improvement and the point 50 ft. from the most river-proximal, down valley corner of the existing improvement and then drawing a line from each of those two points away from and perpendicular to the river.
- (2) To meet these performance standards, existing below ground improvements may be considered in defining a shadow area for new and replacement below ground improvements (Figure 5). New and replacement below ground improvements that meet (b)(1) above or the following conditions may be admissible within the river corridor:
- (A) Any below ground improvement must be located no closer to the river than any existing below ground utility as measured horizontally from the below ground point of the existing utility nearest to the top of bank;
 - (B) Any below ground improvement must be located behind the existing above ground improvement or may extend down valley from the existing below ground utility up to 50 ft. from the most river-proximal, down-valley corner of the existing below ground improvement (Figure 4). The area behind an existing below ground improvement shall be determined by finding the most upstream point of the existing improvement and the point 50 ft. from the most river-proximal, down valley corner of the existing improvement and then drawing a line from each of those two points away from and perpendicular to the river.

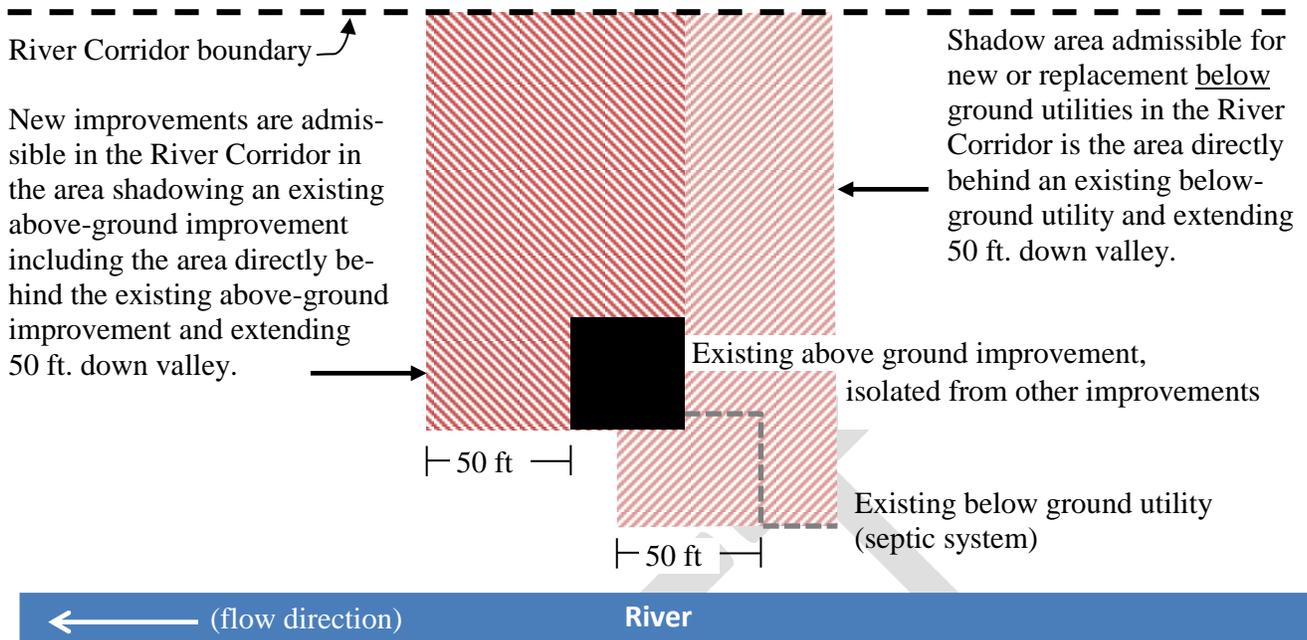


Figure 5. Red cross-hatched areas where new above and below ground improvements may be permitted within 50 feet of the most downstream, river-proximal edge of an existing improvement. The 50 foot shadow area is measured in the down valley direction from the furthest downstream edge of the existing improvements. Shadow areas do not extend in the upstream direction.

DRAFT